


# 4250 LAMINATOR

## FILM LOADING AND THREADING

THREADING DIAGRAM  
LAMINATOR SIDE VIEW



LAMINATOR ISOMETRIC VIEW

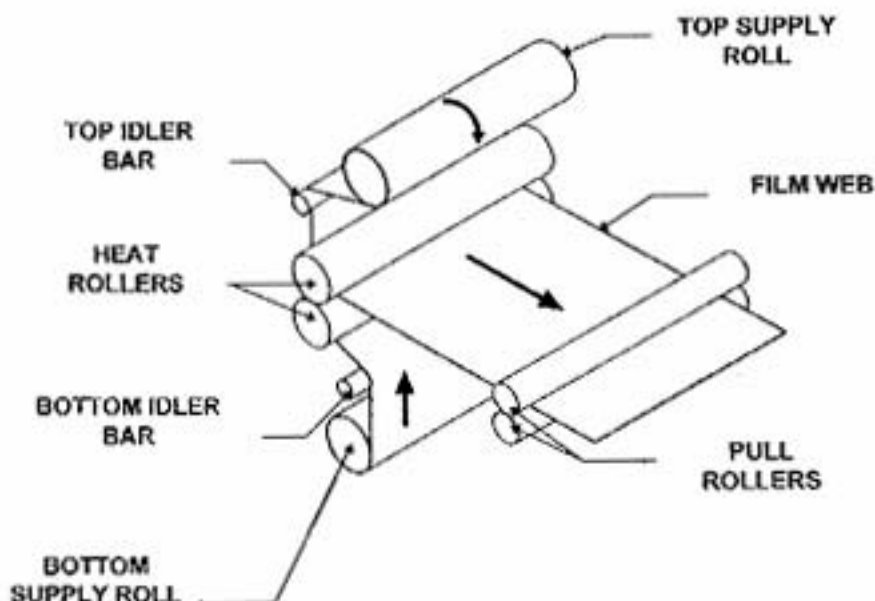


FIGURE 4

The top and bottom rolls of laminating film must be of the same width and must be present simultaneously. A small amount of adhesive will "squeeze out" during lamination. Hardened adhesive deposited on the rollers may damage the heat rollers. Rotate the rollers at the "Slow" speed setting only to avoid damaging the rollers, when the laminator has not achieved full operating temperature as indicated by a flashing Wait lamp. Refer to the section entitled CARING FOR THE GBC4250 LAMINATOR for instructions regarding removal of the accumulated adhesive.